



**78-124-01 & 78-125-01A SERIES**  
BRONZE 5-PORT FUEL SELECTOR BALL VALVE




Unique ball design allows for higher flow capacities. Perfect for tank selection on larger vessels. Five port construction allows access to four tanks using only one valve.

**FEATURES**

- Five NPT Connections
- Bronze Ball Valve with Stainless Steel Lever and Nut
- RPTFE Stem Packing (Virgin Seats)
- Stem Packing Adjustable for Wear
- 50 psig Pressure Rating
- Operation: Four Selected Inlets Feed One Common Outlet - Pointer on Handle Indicates the Selected Inlet
- Non-Lubricated
- Easy Mounting Design

**DIMENSIONS**

PART NUMBER	SIZE	DIMENSIONS (IN.)								WT. (LB.)
		A	B	C	D	E	F	G	H	
78-124-01	1/2"	0.50	1.26	2.52	2.27	3.53	1.12	10-24	1.40	1.06
78-125-01A	3/4"	0.75	1.53	3.12	2.87	3.87	1.53	1/4-20	1.98	2.64

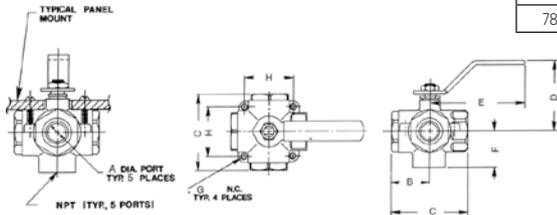

**70-600-10 SERIES**  
THREE-WAY DIVERTER VALVE



Fuel tank selection, oil transfer, and water tank selection are only a few of the uses for this versatile valve.


**FEATURES**

- Bronze Body
- Chromium Plated Bronze Ball
- RPTFE Seats and Stuffing Box Ring
- Stainless Steel Lever and Nut
- Mounting/Bonding Pads
- Blowout-Proof Stem Design
- 400 psig Service Rating
- Adjustable Packing Gland

**DIMENSIONS**

PART NUMBER	SIZE	DIMENSIONS (IN.)									WT. (LB.)
		A	B	C	D	E	F	G	H	I	
70-603-10	1/2"	0.50	1.09	2.25	1.75	3.87	1.18	0.87	1.37	10-24	.76
70-604-10	3/4"	0.68	1.50	3.00	2.12	4.87	1.62	0.87	1.37	10-24	2.31
70-605-10	1"	0.81	1.59	3.18	2.25	4.87	1.71	0.87	1.37	10-24	2.04
70-606-10	1-1/4"	1.00	1.97	3.95	2.69	5.50	2.01	0.93	1.50	1/4-20	3.85
70-607-10	1-1/2"	1.25	2.21	4.40	2.87	5.50	2.38	0.94	1.50	1/4-20	5.22
70-608-10	2"	1.50	2.34	4.69	3.00	5.50	2.50	0.94	1.50	1/4-20	6.20

*Also available in all Stainless Steel. Specify 76-600 Series.*

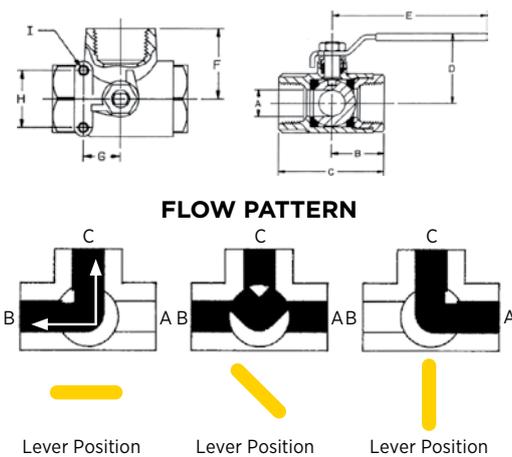

NOTE: Open port pressure must exceed closed port pressure.

