


PERFORMANCE:

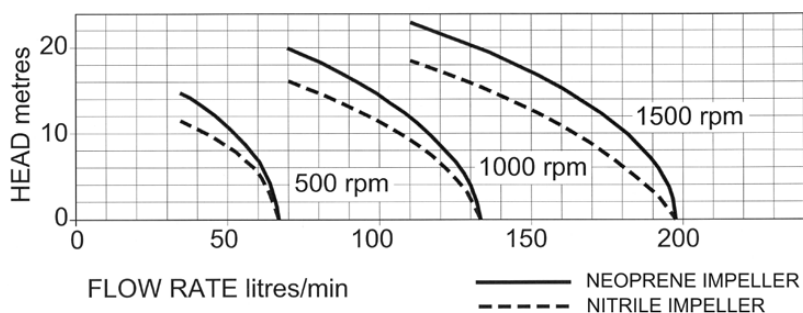


MODEL	Maximum flow rate		Maximum head	
	l/min	gall/min	metres	feet
51200-2**1	195	42	23	75
51200-2**3	195	42	18	59

Max Power absorbed 1800 watt at 1500rpm

DIMENSIONS:

WEIGHT: 8 Kg

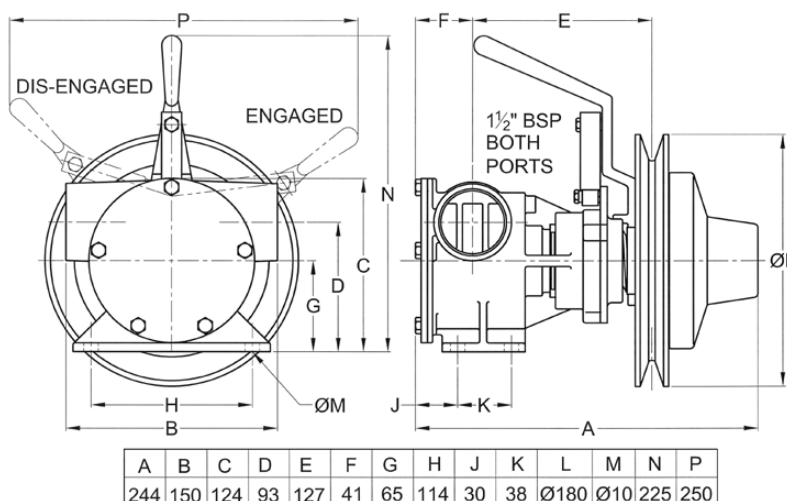

MATERIALS OF CONSTRUCTION:

Body	Bronze
Impeller	Neoprene or oil resistant Nitrile
Wearplate	Replaceable
Shaft	Stainless steel type 316
Shaft seal	Mechanical carbon/ceramic
Bearings	Twin row, ball type
Port type	1 1/2" BSP to BS21 (DIN2999)
Clutch type	Manual – Self adjusting
Pulley	180mm dia A or B section

MODELS:

51200-2011	Neoprene Impeller
51200-2003	Nitrile Impeller
51200-2021	Neoprene Impeller, High pressure



a xylem brand

BRONZE FLEXIBLE IMPELLER - MANUAL CLUTCH

51200 SERIES



PUMP with 1 1/2" BSP PORTS

- * Constructed from marine quality bronze and stainless steel
- * Self-prime from dry up to 2.4m
- * Easy to service and maintain
- * Will tolerate abrasive wear
- * Handles hard and soft solids without clogging
- * Can pump in either direction
- * Will not airlock

Xylem Water Solutions UK Ltd
Bingley Road
Hoddesdon
Hertfordshire • EN11 0BU UK

Tel: +44 (0)1462 480380
Fax: +44 (0)1462 482422
mail@clegghorn.co.uk
www.jabscoshop.com

xylem
Let's Solve Water



GENERAL
Marine
SERVICES

156 Beaumont Street • Westhaven • Auckland • New Zealand
Sales Ph +64 9 309 0048 • sales@generalmarine.co.nz
Service Ph +64 9 368 0938 • service@generalmarine.co.nz

www.generalmarine.co.nz